


## Spacer-Bar Colour Options for Double Glazed Units



Standard DG Units are inclusive of two panes of Glass separated by a Spacer Bar. Typically the internal pane of glass has a special coating such as Low E which increases the thermal efficiency of the double glazed unit. The vacuum between the panes is filled with an Inert Gas Such as Argon to further increase the thermal performance.

The configuration of our Standard DG Units is shown on the right with your colour options for spacer bars shown to the left.

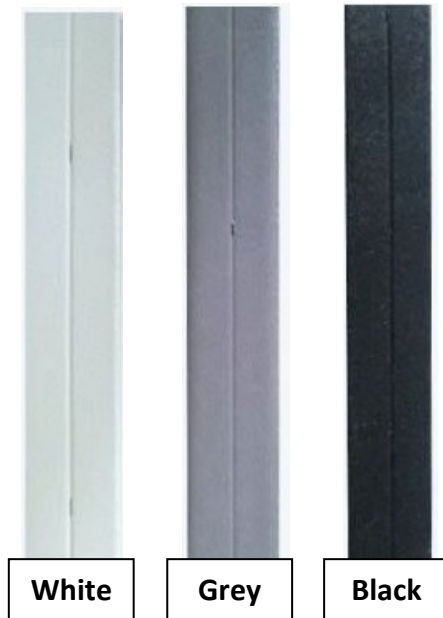

Our standard DG units are fully in accordance with the British Standard Building Regulations & FENSA Guidelines. Safety Glazing must be included to all glazing below 800mm from the Finished Floor Level, in **All** Doors, and glazing within 300mm of a Door.

***For further information please reference Part K of the building regulations.***

Other Glazing configurations are available to meet Secured by Design, Acoustic Attenuation, Higher Thermal Properties and Self Cleaning purposes. Please speak to our sales department should you require further details.